



Schneider EVlink Pro AC


Cleenergy EV Platform Onboarding Guide

- Download the **Schneider eSetup** app for your device.

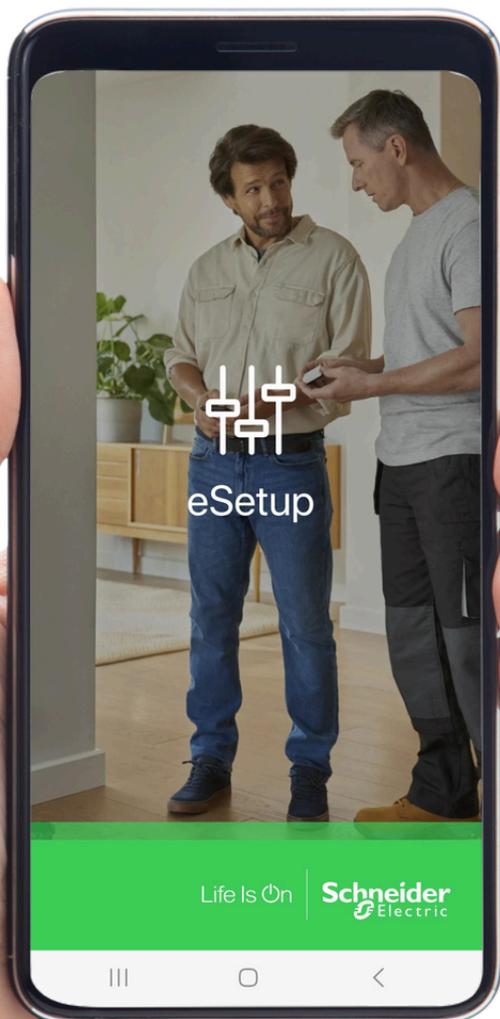


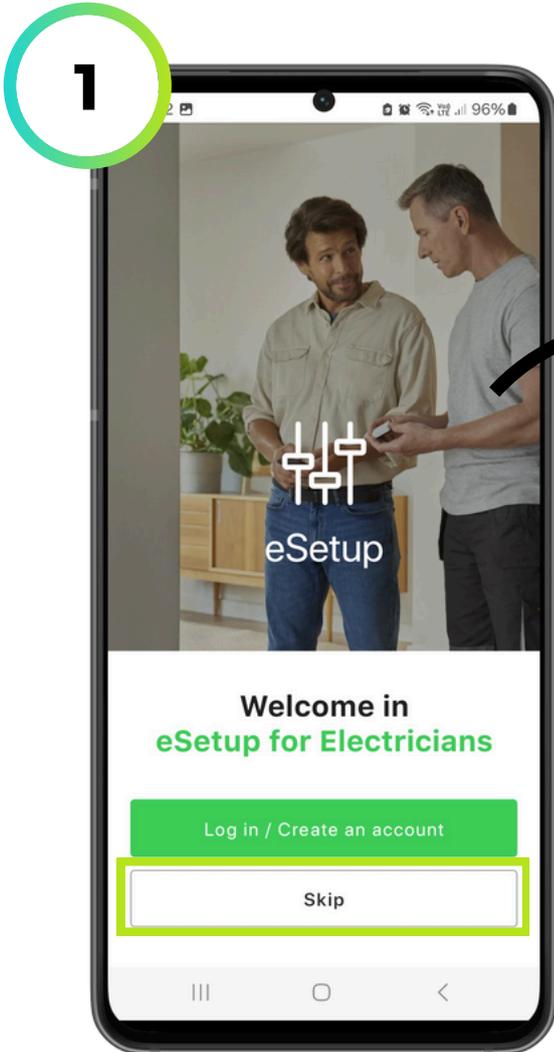


1. Once installed, open the Schneider eSetup app on your device. Select Skip to proceed.

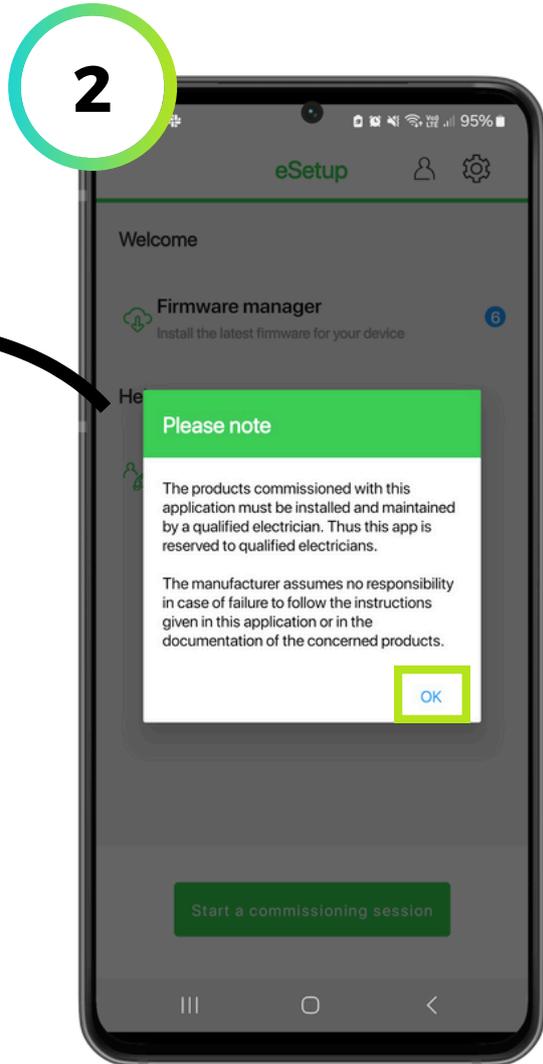


2. Review the disclaimer and select OK.

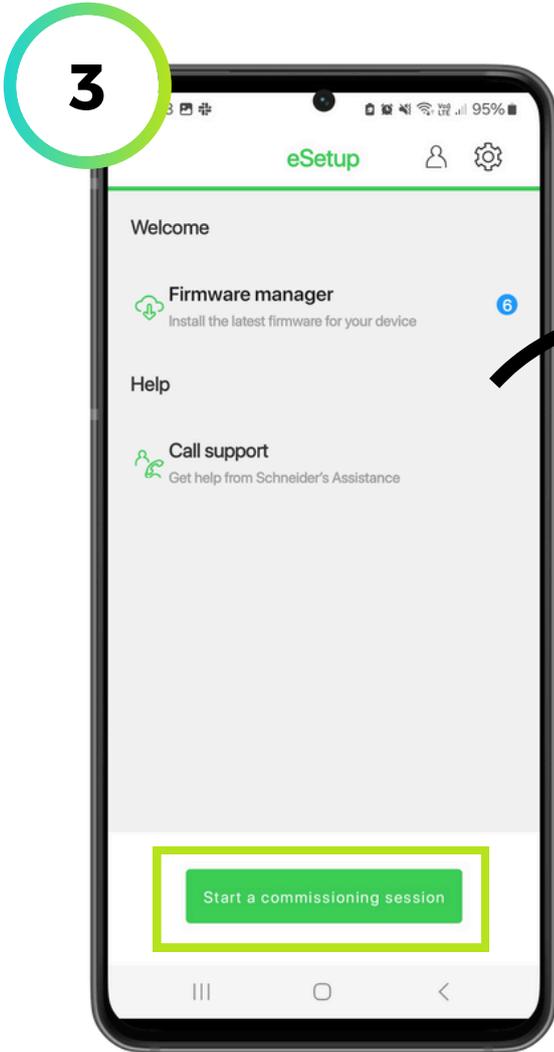


3. Select Start a commissioning session.

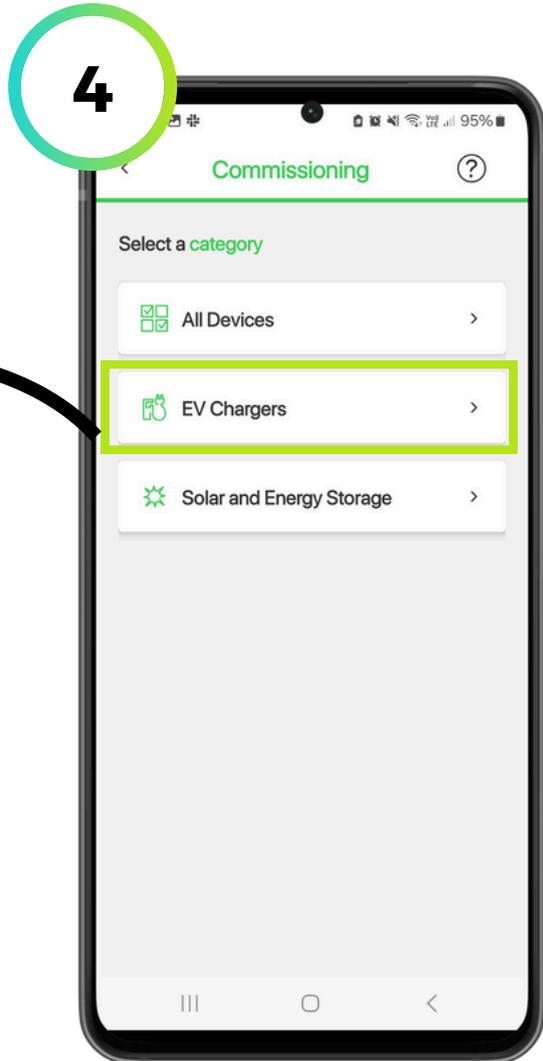

4. Select EV Chargers.

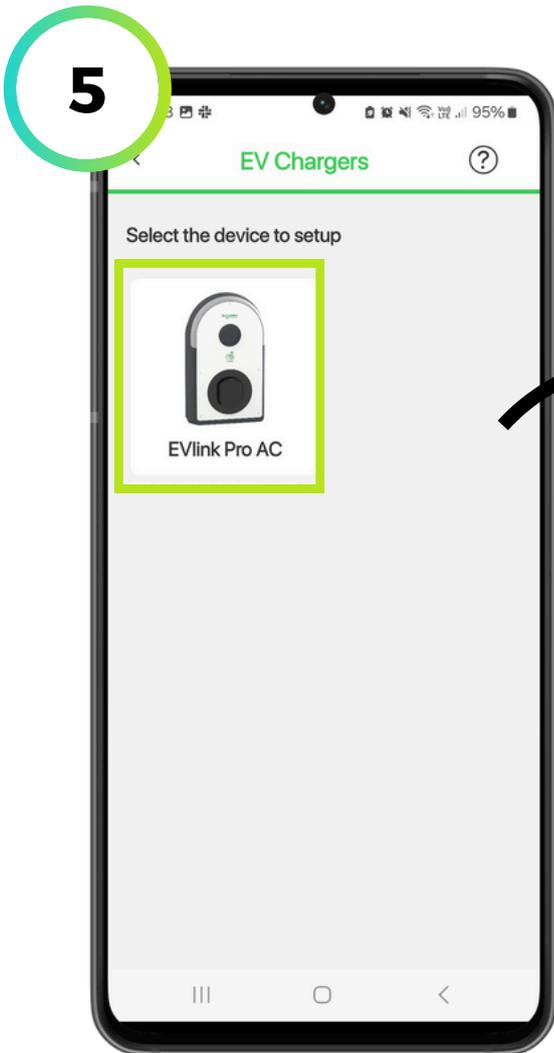


5. Select EVlink Pro AC to proceed.

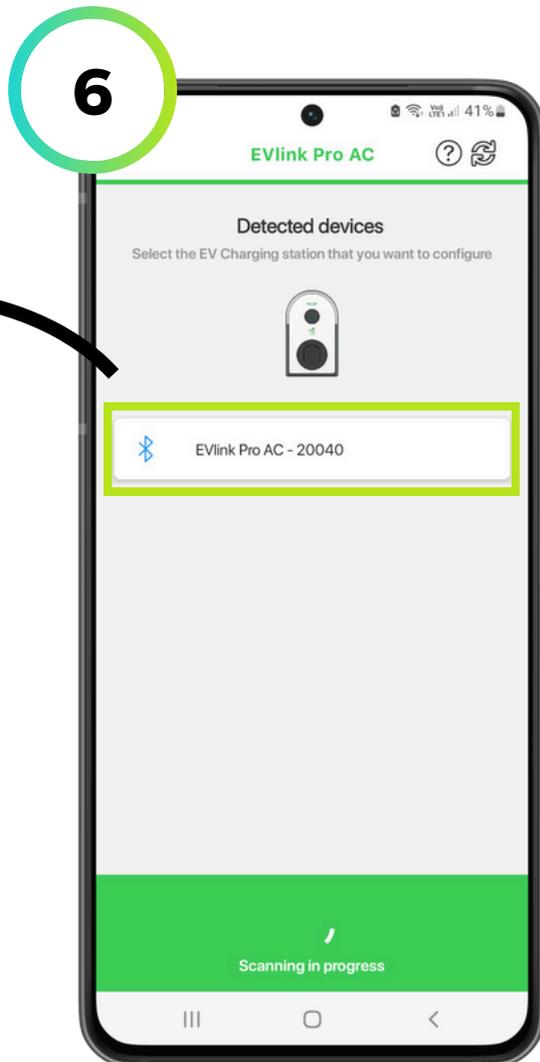

6. The app will scan for and display a list of available charge points. **Select the relevant unit** from the list (if more than one appears).


Please note: Bluetooth communication is only available for 2 hours after the charge point is powered up. Please ensure Bluetooth is activated on your device.

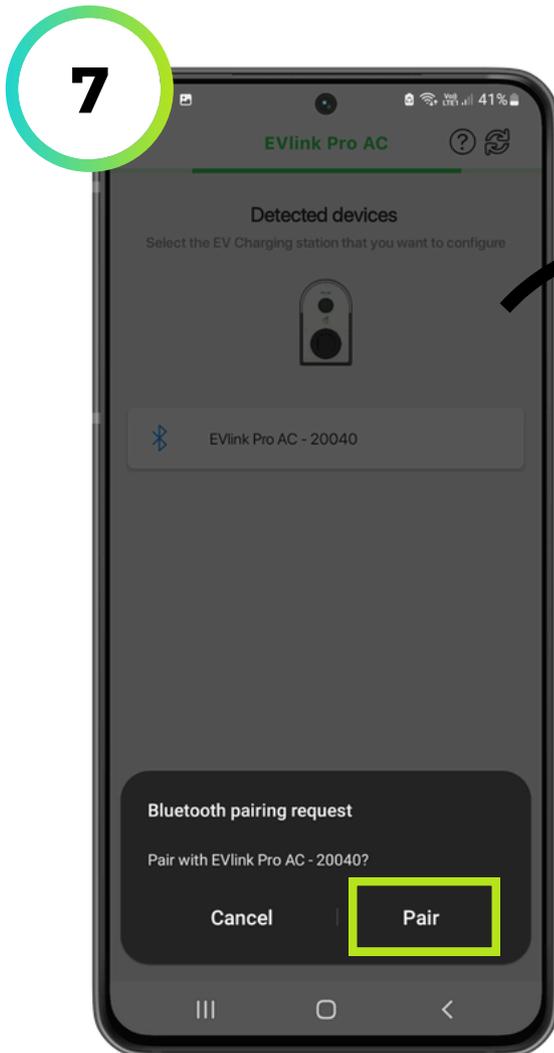


7. When prompted, allow your device to pair with the charge point. The LED on the charge point should blink several times to indicate that a successful connection has been established.




8. Create and confirm a security pin that will be used to access the charge point going forward then select Save to proceed.

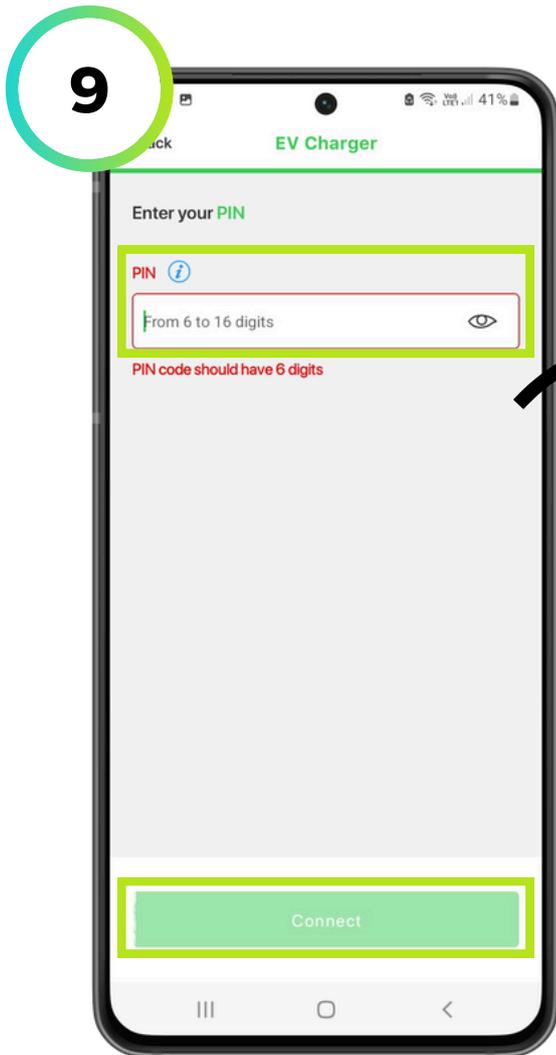

9. Enter the newly created pin from the previous step and select **Connect**.

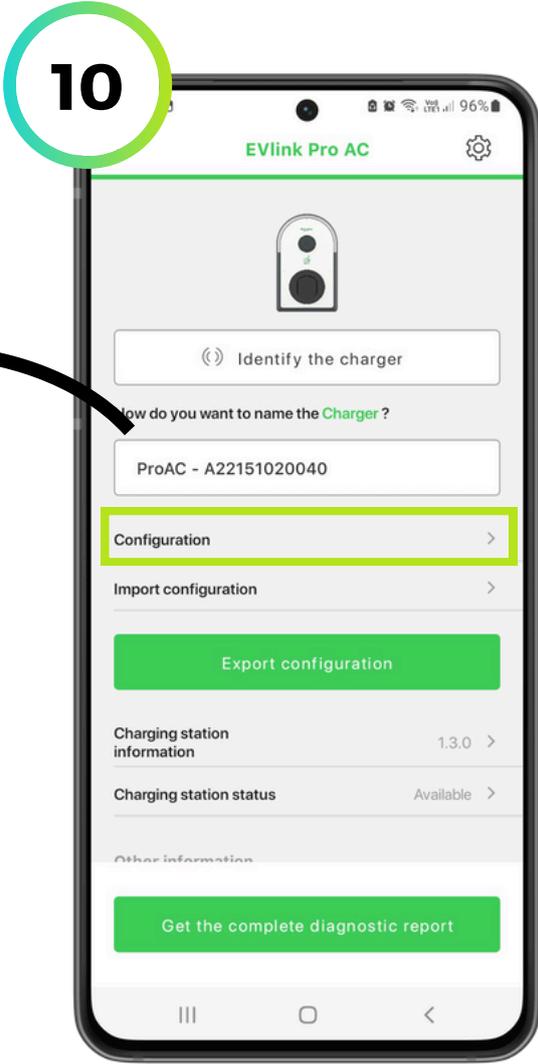


10. Select **Configuration** to proceed.

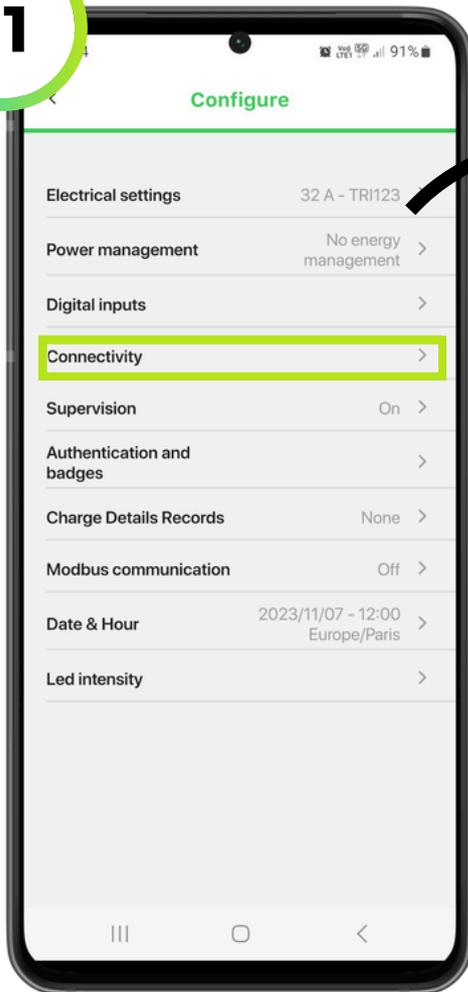11


11. Select **Connectivity** to establish a network connection using the appropriate credentials.

Please note: If using the optional 3G/4G module with a Clenergy EV SIM card please use the following the credentials: APN: **eapn1.net**
Username/Password: **clenergy**

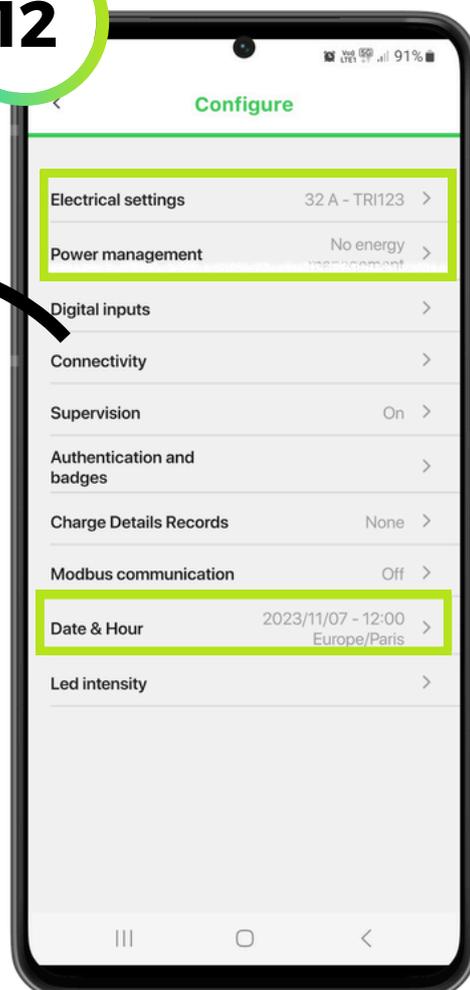12

12. Return to the **Configure** menu and use the relevant sections to alter the **date/time** and **electrical settings** to meet the installation requirements.


13

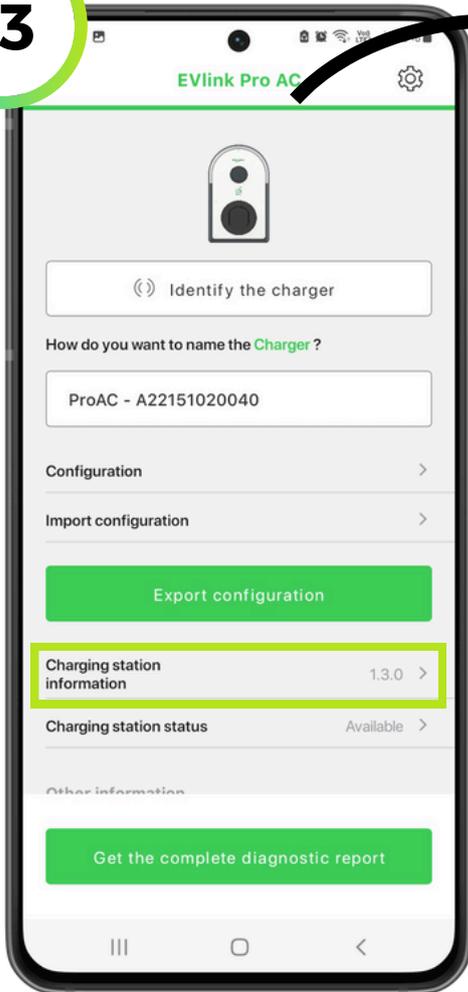

14. Return to the charge point home screen and select **Charging station information** to complete a **firmware update** if required.


Please note: For detailed information regarding the firmware update process please refer to the following link: [How to update EVlink Pro AC firmware with eSetup|Schneider Electric](#)

14

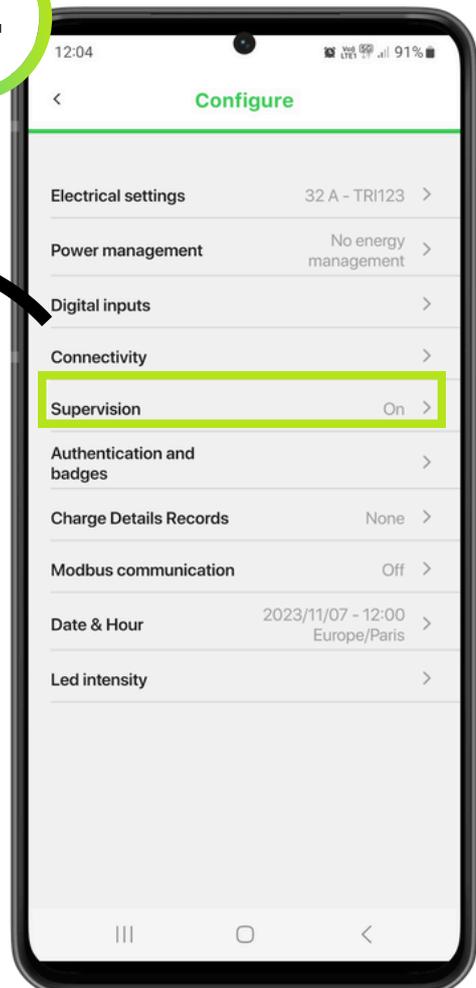


15. Return to the Configure menu and select **Supervision**.

15

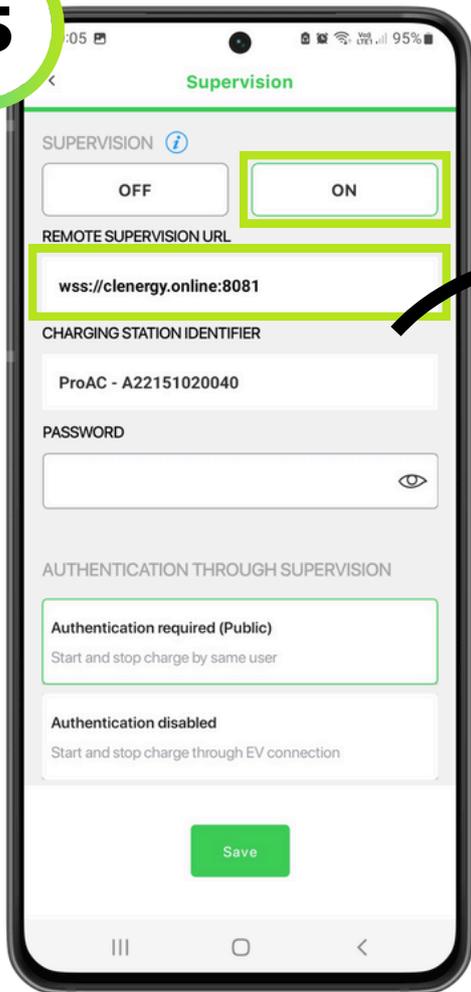


16. Toggle Supervision on and enter wss://clenergy.online:8081 into the Remote Supervision URL field.

16

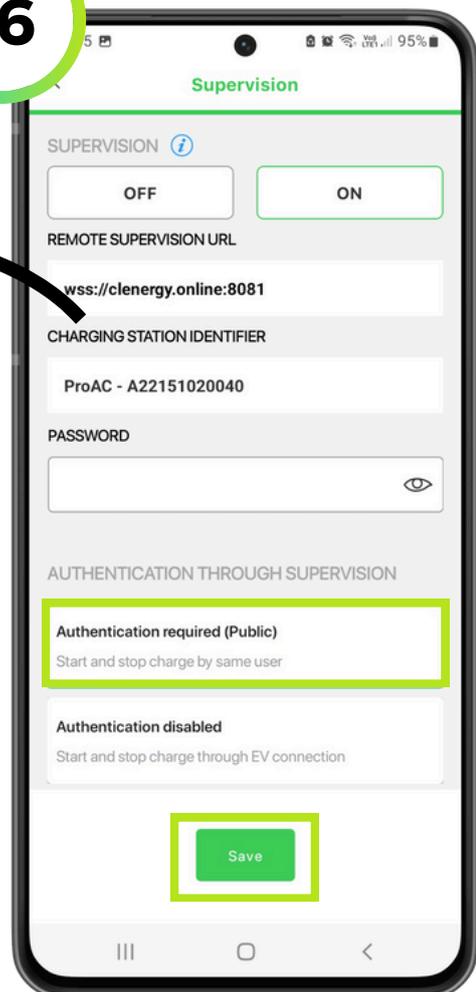


17. Select Authentication required (Public) then Save.

17

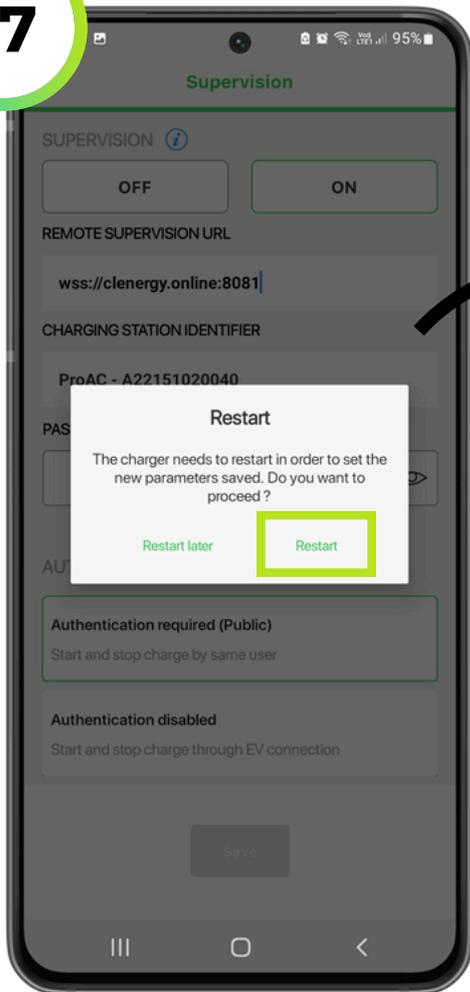

18. When prompted select Restart.

18

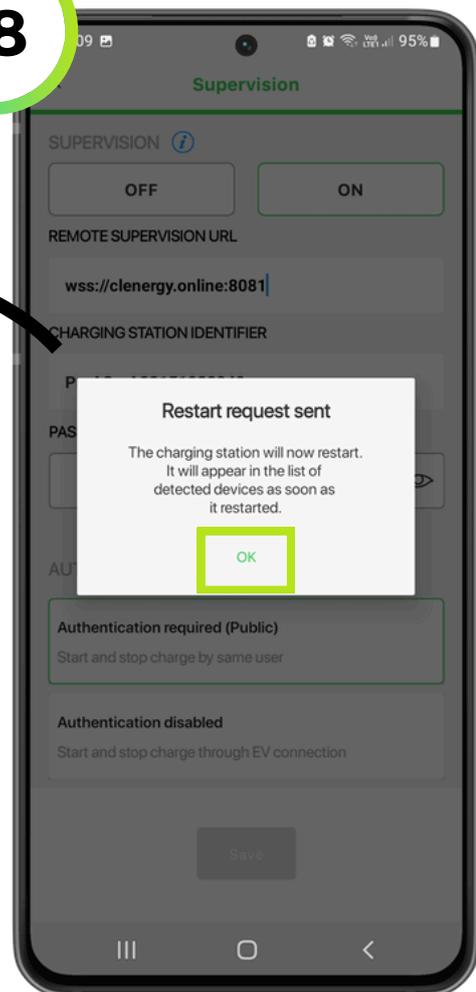

19. Select OK to confirm the reboot and complete the onboarding process.